


ACS JOINT PAH BAND

Thermoplastic Elastomer Based, Polyester Mesh Backing Wall and Floor Chamfer Tape

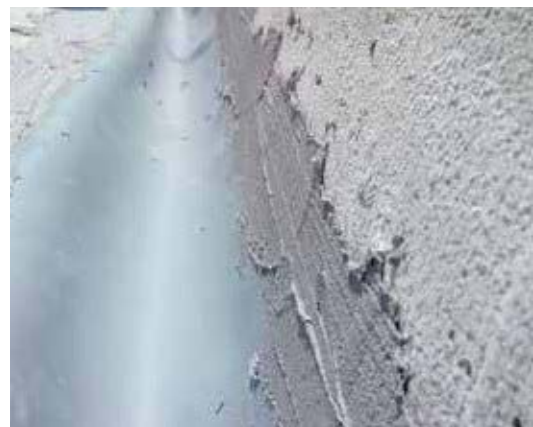

■ Description

ACS JOINT PAH BAND® It is a waterproofing tape based on thermoplastic elastomer, reinforced with polyester mesh, used for the insulation of wall and floor joints and structural joints.

■ Places of usage

- In wet areas
- It is used in the chamfers of the floor and wall joints, in the insulation of the joints of precast or reinforced concrete roof streams.
- In pools
- In water tanks

- In treatment plants
- On balconies, parapets
- Terraces, Roof ends
- It is used in compensating and insulating movements in cold joints and dynamic cracks in floors and curtains with its elastic structure.

■ Advantages

- Easy to apply
- Provides a permanent insulation
- Resistant to many chemicals,
- Resistant to ozone and UV.



Technical Characteristics

Dimensions	20mm / 70mm - 150mm / 100mm
Appearance	Grey
Thickness	0,55mm
Weight	32gr/mt
Shore A Hardness	70
burst pressure	3 bar
Water Compressive Strength	1,5 bar
Elongation Coefficient	%25
Elongation at Break	%130 / %30 (transverse%/longitudinal)
Temperature Resistance	-50 C / +90 C

ACS JOINT PAH BAND

Thermoplastic Elastomer Based, Polyester Mesh Backing Wall and Floor Chamfer Tape

Application procedure/Surface preparation

The surfaces to be applied should be cleaned of oil and dirt, the defects on the surface should be corrected with epoxy repair mortar. For best results, air should be trapped before applying the dilatation tape to the dilatation edges. Layers that will reduce adherence such as dust, oil, grease, dirt, paint, cement foam, rust, salt flaking must be completely cleaned before application. The drying time of the adhesive may vary depending on hot and cold weather conditions. Applications should not be made at temperatures below +5°C.

Shelf life

Shelf life of ACS JOINT PAH BAND® is unlimited from the date of manufacture under suitable storage conditions. Opened packages can be used throughout their shelf life if their caps are tightly closed.

Packaging

ACS JOINT PAH BAND® 50 m roll, in white cardboard box

Safety

During the application, work clothes, protective gloves, goggles and masks in accordance with the Occupational and Occupational Health Rules should be used. Due to the irritating effects of uncured materials, the components should not come into contact with the skin and eyes. In case of contact, they should be washed with plenty of soap and water. If swallowed, a doctor should be consulted immediately. Food and beverage materials should not be brought into the application areas. It should be stored out of the reach of children. For detailed information, see the Material Safety Data Sheet.



Responsibility

The data which contains in this technical document is based on our scientific and practical knowledge. ACS A PLUS CONSTRUCTION SOLUTION YAPI ANONİM ŞİRKETİ is only responsible for the quality of the product. ACS A PLUS CONSTRUCTION SOLUTION YAPI ANONİM ŞİRKETİ is not responsible for results that may occur because the product is used other than advised and/or out of instructions regarding the place and the method of use. This technical form is valid only till a new version is implemented and nullifies the old ones. (06/2019)